

MEGAPOWER

2600 Lumens XGA LCD IWB Projector *ML-368-I*

*High
Performance
Projector
with
Built-in
Interactive
Whiteboard*



- High Brightness - 2600 ANSI lumens
- Integrated Interactive Whiteboard
- Built-in RJ45 LAN Management Control
- Auto Keystone Function
- Quick Start and Off (10 seconds)
- Anti-Theft Electronic PIN Lock and Metal Anchor Lock

MEGAPOWER
INDUSTRIAL LIMITED

Suite 903, Park Tower
15 Austin Road
Tsimshatsui, Kowloon
Hong Kong

Phone: 852-6216-0140

Fax: 852-8147-1900

Email: megapwr@netvigator.com

The MEGAPOWER ML-368-I utilizes state-of-the-art technology to integrate Interactive Whiteboard function inside the projector. This functions allows real time annotation of the projected image that encourages classroom interaction and makes business meetings more effective. No clumsy whiteboard needed. Take it with you on the road!


Brightness, high quality video, outstanding computer resolutions, and great pricing are what make MEGAPOWER your choice for projection.

ML-368-I PROJECTOR



Optical	
Projection system	3 LCD technology
Brightness	2600 lumens
Contrast ratio	500:1
Resolution	Native: XGA (1024 x 768)
	Maximum: UXGA (1600 x 1200)
	Aperture ratio: 4:3 native / 16:9 compatible
Projection lens	1.2X Zoom lens, f=18.53 ~ 22.18mm, F/1.65 ~ F/1.93
Lamp	200W ultra high pressure Lamp
Fan Noise	33dB @ ECO
Throw distance	1.11~10.57m (Approx.100" at 2.88M)
Throw ratio	1.41~1.7
Signal	
Scan rate	Horizontal 31 to 92 kHz ; Vertical 48 to 120 Hz
Color system	NTSC / NTSC 4.43 / PAL (including PAL-M,N) / SECAM/PAL60
Video signals compatibility	480i/p, 576i/p, 720p, 1080i
PC signals compatibility	VGA, SVGA, XGA, SXGA, WXGA, UXGA
Keystone correction	Vertical +/- 30°
Inputs / Outputs	
Input terminals	RGB: Mini D-sub 15 pin x 1, DVI-I x 1 Composite Video: RCA x 1, S-Video x 1 Audio: mini jack x 2 , RCA(L,R) x 1 Component Video: RCA x 3
Output terminals	RGB: Min D-sub 15 pin x 1 Audio: mini jack x 1
Mouse control port	USB type B x 1
Control terminals	RS-232C D-sub 9 pin x 1
LAN (RJ45)	Yes, for Management Control
Speaker	
	Mono 8W X 1
General	
Dimensions (WxHxD)	325 x 97 x 260 mm
Net Weight	3.4 kg
Power requirement	AC 100 to 240 V, 50/60 Hz
Power consumption	Max. 285W , Standby < 2.6W
Standard Accessories	
	Remote control (Card Type)
	AC power cord (1.8M) , VGA cable (1.5M)
	LightPen & E-wand with Soft-Carrying Bag
	Owner's Manual CD
	Quick Start Guide

ML-368-I PROJECTION DISTANCE

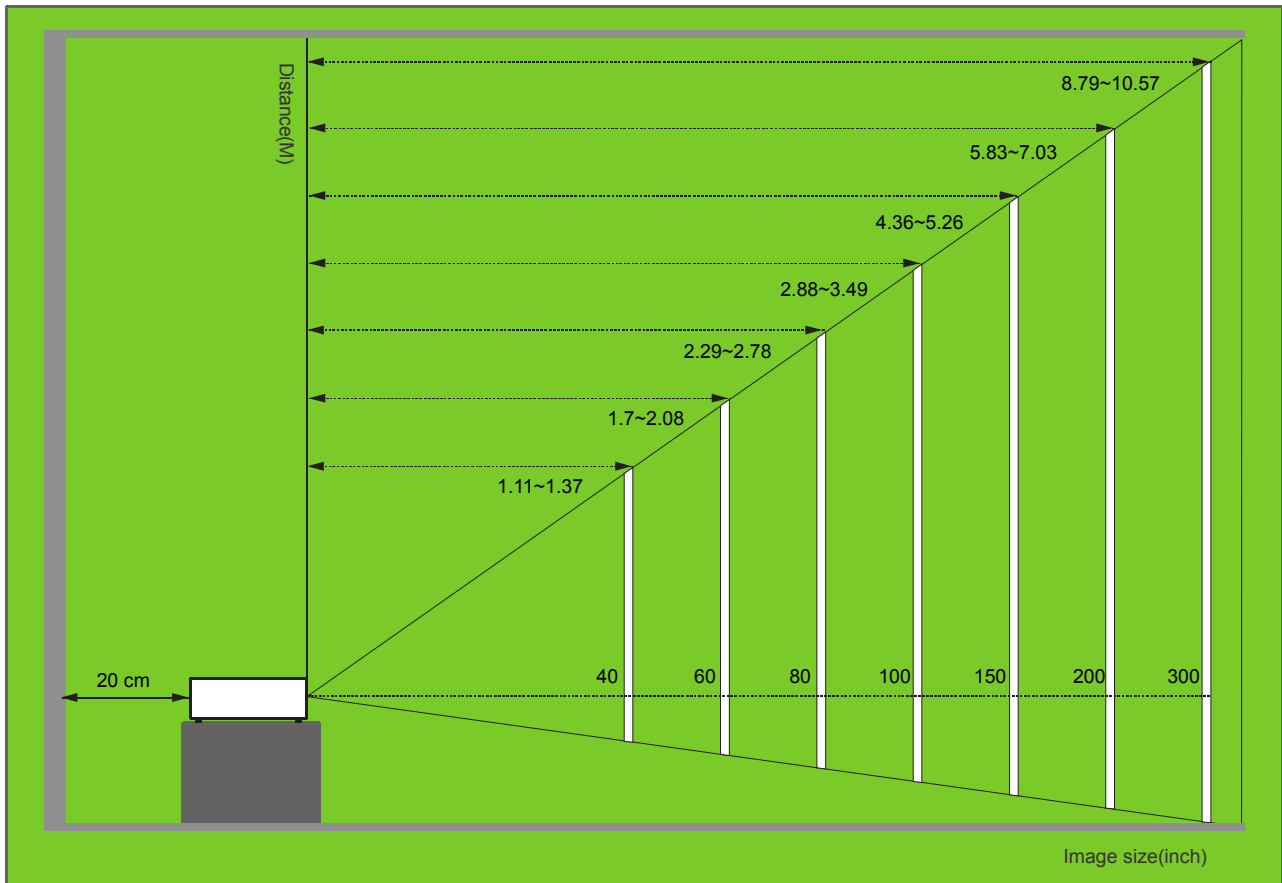

Screen size (diagonal)		Distance (m)		Distance (feet)	
inch	m	Tele	Wide	Tele	Wide
40	1.0	1.37	1.11	4.49	3.64
50	1.25	1.72	1.4	5.65	4.61
60	1.5	2.08	1.7	6.81	5.58
70	1.8	2.43	2.00	7.97	6.54
80	2.0	2.78	2.29	9.13	7.51
90	2.25	3.14	2.59	10.29	8.48
100	2.5	3.49	2.88	11.45	9.45
150	3.8	5.26	4.36	17.26	14.29
200	5.1	7.03	5.83	23.06	19.13
250	6.4	8.80	7.31	28.87	23.98
300	7.6	10.57	8.79	34.67	28.82

MEGAPOWER INDUSTRIAL LIMITED

Suite 903, Park Tower, 15 Austin Road, Tsimshatsui, Hong Kong

Tel: 852-6216-0140 Fax: 852-8147-1900

Email: megapwr@netvigator.com Web site: www.mega-power.com