

# MEGAPOWER®

*“ The First Name in Digital Projector “*

**NEW!!**

## ML-369


- 3000 ANSI Lumens
- XGA and UXGA Resolution
- Last 3LCD panel technology
- 6 Auto function : Auto Search, Auto Sync, Auto Ceiling , Auto Keystone, Auto Filter Alarm, Auto lamp Alarm
- Digital Zoom
- DVI-I input
- Built in RJ45 LAN
- Quick Start and Off (10 seconds )
- Anti-Theft Electronic PIN Lock and Metal Anchor Lock
- User-friendly installation and maintenance
- Designed with schools in mind
- 3.4 kg




## High Performance Portable Projector

The MEGAPOWERS ML-369 is designed for high performance but at budget price. ML-369 gives you 3000 lumens of XGA ( 1024 x 768 ) resolution. Extensive connectivities as two computer inputs ( DVI , RGB ), one monitor out put amongst others, provide multi-purpose applications . The ML-369 can be established in large conference, seminar and class room.

Brightness, high quality video, outstanding computer resolutions and great pricing are what make MEGAPOWERS your choice for projection.

<b>Optical</b>	
Projection system	3LCD 0.63" with micro lenses
Brightness	3000 Ansi Lumens
Contrast ratio	500:1
Resolution	Native: XGA (1024 x 768)
	Maximum: UXGA (1600 x 1200)
	Aperture ratio: 4:3 native / 16:9 compatible
Projection lens	1.2X Zoom lens, f=18.53 ~ 22.18mm, F/1.65 ~ F/1.93
Lamp	200W ultra high pressure Lamp
Fan Noise	33dB @ ECO
Throw distance	1.11~10.57m (Approx.100" at 2.88M)
Throw ratio	1.41~1.7
<b>Signal</b>	
Scan rate	Horizontal 31 to 92 kHz ; Vertical 48 to 120 Hz
Color system	NTSC / NTSC 4.43 / PAL (including PAL-M,N) / SECAM/PAL60
Video signals compatibility	480i/p, 576i/p, 720p, 1080i
PC signals compatibility	VGA, SVGA, XGA, SXGA, WXGA, UXGA
Keystone correction	Vertical +/- 30°
<b>Inputs / Outputs</b>	
Input terminals	RGB: Mini D-sub 15 pin x 1, DVI-I x 1 Composite Video: RCA x 1, S-Video x 1 Audio: mini jack x 2 , RCA(L,R) x 1 Component Video: RCA x 3
Output terminals	RGB: Min D-sub 15 pin x 1 Audio: mini jack x 1
Mouse control port	USB type B x 1
Control terminals	RS-232C D-sub 9 pin x 1
LAN (RJ45)	Yes, for Management Control
<b>Speaker</b>	
	Mono 8W X 1
<b>General</b>	
Dimensions (WxHxD)	325 x 97 x 260 mm
Net Weight	3.4 kg
Power requirement	AC 100 to 240 V, 50/60 Hz
Power consumption	Max. 285W , Standby < 2.6W
<b>Standard Accessories</b>	
	Remote control (Card Type)
	AC power cord (1.8M) , VGA cable (1.5M)
	LightPen & E-wand with Soft-Carrying Bag
	Owner's Manual CD
	Quick Start Guide

# PROJECTION DISTANCE

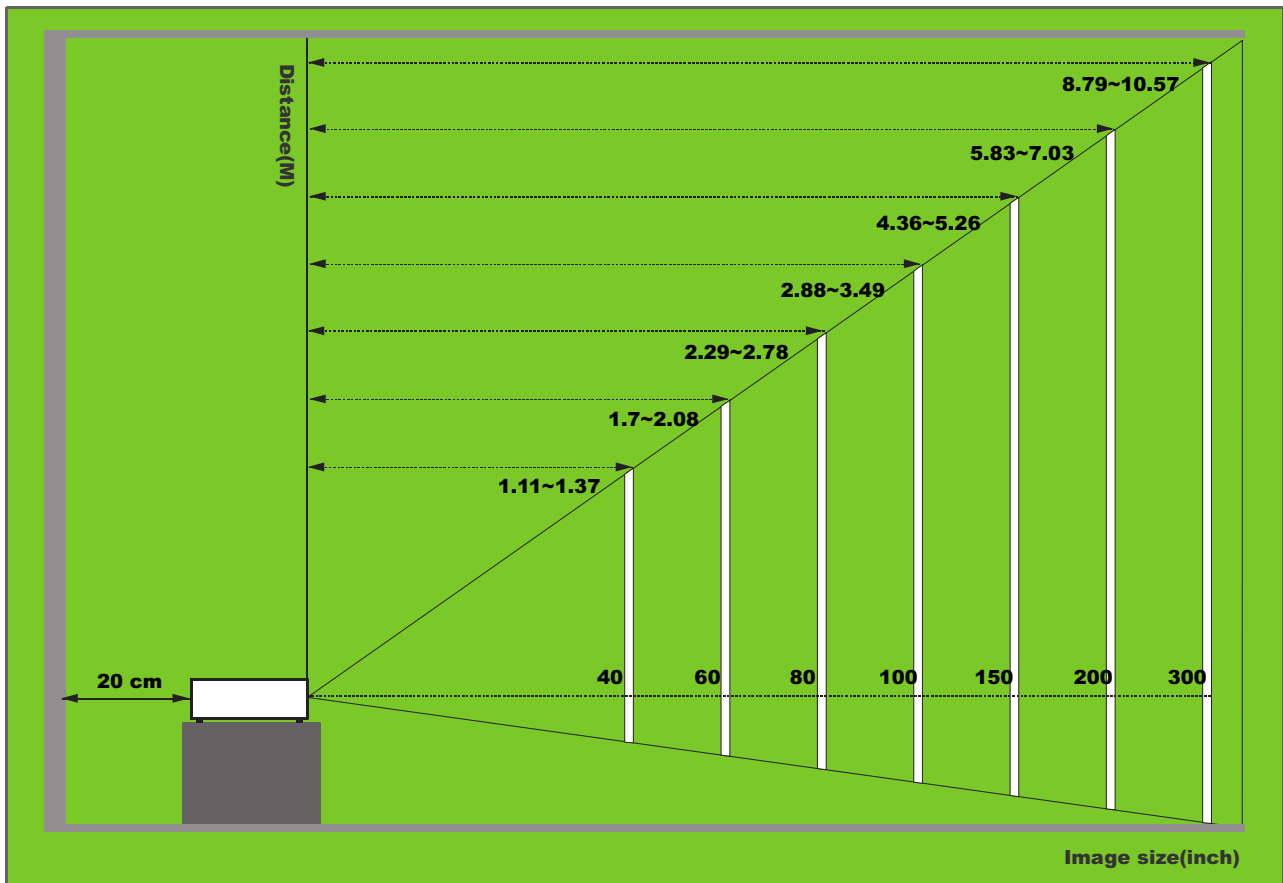

Screen size (diagonal)		Distance (m)		Distance (feet)	
inch	m	Tele	Wide	Tele	Wide
40	1.0	1.37	1.11	4.49	3.64
50	1.25	1.72	1.40	5.65	4.61
60	1.5	2.08	1.70	6.81	5.58
70	1.8	2.43	2.00	7.97	6.54
80	2.0	2.78	2.29	9.13	7.51
90	2.25	3.14	2.59	10.29	8.48
100	2.5	3.49	2.88	11.45	9.45
150	3.8	5.26	4.36	17.26	14.29
200	5.1	7.03	5.83	23.06	19.13
250	6.4	8.80	7.31	28.87	23.98
300	7.6	10.57	8.79	34.67	28.82

## MEGAPOWER IND. LTD.

Suite 903, Park Tower, 15 Austin Road,  
 Tsimshatsui, HongKong SAR in China  
 Tel: 852-6216-0140 Fax: 852-8147-1900  
 E-mail: magapwr@netvigator.com  
 Web site : <http://www.mega-power.com>

